


**Introduction**

OK Industries introduces the DFB Series Wrap/Unwrap Bit & Sleeve Set. This innovative product represents a truly revolutionary approach to wire wrapping, by combining both the wrap and the unwrap functions into one bit/sleeve set. The bit is precision machined for high quality wrapping in the clockwise direction, but also includes the removal mechanism that is used to unwrap when operated counterclockwise. The user can quickly and easily switch back and forth between wrap and unwrap mode by retracting or extending the retractable sleeve, and flipping the switch on the PTX wire wrapping tool. This product, which can wrap or unwrap 22 - 26 AWG wire, enables the user to maximize operating efficiency while eliminating the need to purchase and carry extra tools or bits for unwrapping.

**Product Usage**

The DFB Series is shipped with the sleeve set in the wrap position. It must be used in conjunction with a reversible PTX wire wrapping tool. To perform wire wrapping operations, simply install the bit and adapter/sleeve into the collet of the power tool, using the same method as a conventional bit & sleeve.

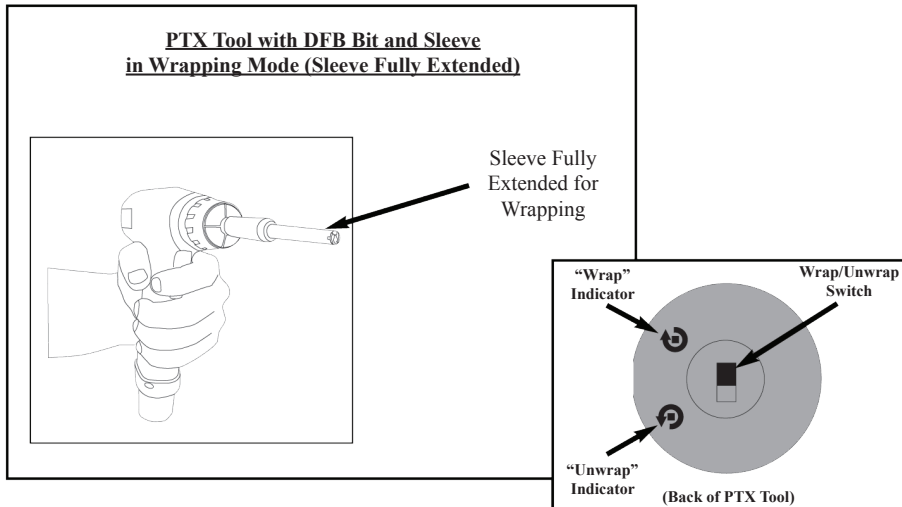

To change to unwrapping mode, ensure that the wrap/unwrap switch on the PTX tool is set in the UNWRAP position. Then, follow instructions in figure 1.

Fig. 1


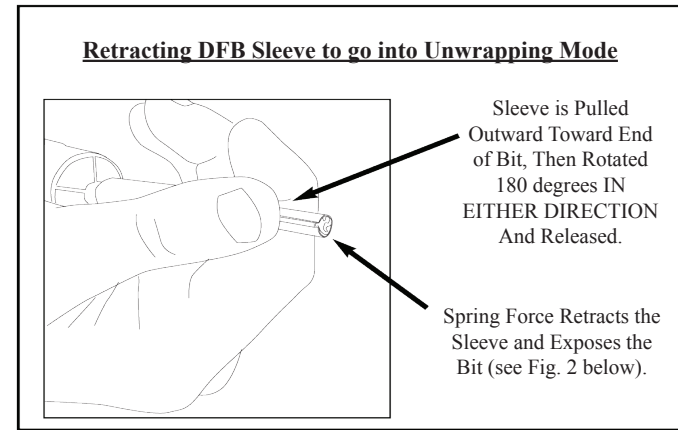


Fig. 2



To change back to the wrap mode, first ensure that the wrap/unwrap switch on the power tool is set in the WRAP position. NEXT, ENGAGE THE TRIGGER ONCE TO RE-INDEX THE BIT TO THE PROPER POSITION. Then, pull the sleeve out approximately 1/4" and rotate the sleeve in either direction 180°, then release. The spout on the sleeve should be in the 12:00 position and the sleeve should be locked in place.

**Note:** If you cannot rotate the sleeve, you need to pull the sleeve out further before trying to rotate the sleeve.

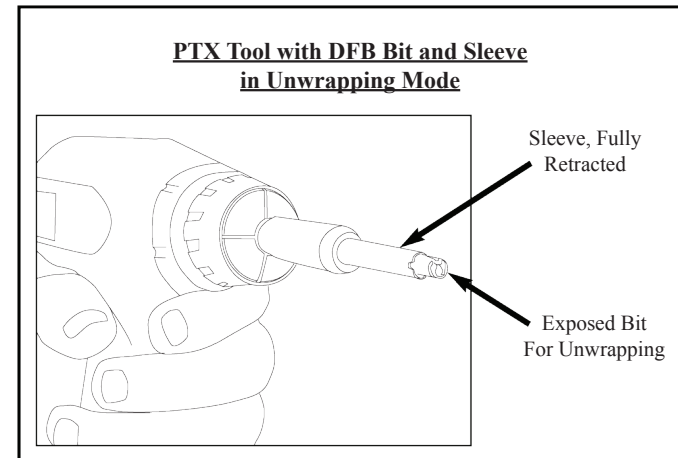

134 Marbledale Road • Tuckahoe, NY 10707  
Tel: 914-793-0700 • Fax: 914-793-4527  
E-mail: sales@jonard.com  
www.jonard.com